

Brice™

A quality range of benchtop vacuum and controlled atmosphere packaging machines ideal for small to medium catering services, restaurants, butchers, delicatessens and general retail.

- **Modified Atmosphere capable**
Use Carbon Dioxide, Nitrogen and Oxygen to extend packaged food shelf life.
- **Easy operation**
Pack, gas and seal in one simple operation.
- **9 pre-programmed cycles**
Select the cycle that suits your products, or create your own.
- **Rotary Vane Vacuum Pump**
German-designed and built Busch vacuum pump for consistent performance, day in and day out.
- **CE approved**



Heavy Duty; Semi-Automatic Operation

Tecnovac
Vacuum Packaging Equipment

Tecnovac

Vacuum Packaging Equipment



The Tecnovac control panel

The Tecnovac range of bench-top vacuum packaging systems are specially designed for efficient and economic packaging and sealing of a wide range of perishable foods. The machines are ideal for restaurants, delicatessens, small goods manufacture, butchers, and catering companies.


For storing, presentation and portion control, vacuum packaging is a real advantage.

- Powerful, German-design and built Busch vacuum pumps;
- Easy one-pass operation;
- 9 pre-programmed cycles to suit every packaging need
- Available in non-programmable versions (E60 and E100 only)
- Single or Twin sealing bar configurations available (See table below);
- Modified Atmosphere capable - can use CO₂, N₂ and O₂ in any approved mix;
- CE Approved.

Options:

- “Gas” attachment for full Modified Atmosphere Packaging (MAP) capability.

Position of Sealing Bar

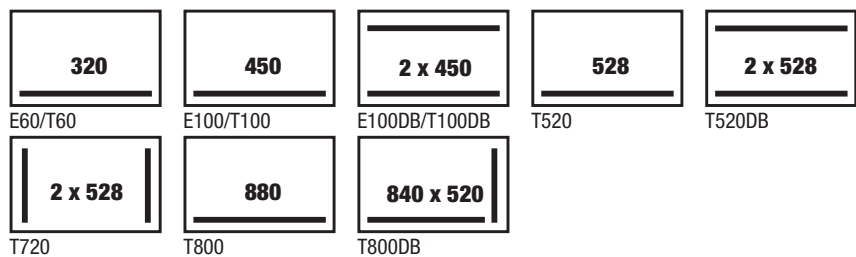

SPECIFICATIONS

	Bench-top models				Free-standing, floor-mounted models		
	<i>E60</i>	<i>E100</i>	<i>T60</i>	<i>T100</i>	<i>T520</i>	<i>T720</i>	<i>T800</i>
Machine Height	405	480	405	480	1050	1000	1000
Machine Depth	410	550	410	550	700	660	686
Machine Width	420	550	420	550	640	780	1043
Chamber Height	155	205	155	205	214	235	213
Chamber Depth	330	470	330	470	610	545	581
Chamber Width	330	465	330	465	540	680	903
Sealing Bar	320	450*	320	450*	528*	2x528	880*
Vac Pump Capacity (m ³ /h)	10	16/20	10	16/20	21/40/63	40/63	63/100
Time per Cycle (sec)	25-30	25-30	25-30	30-40	25-35	20-30	20-30
Power Supply	240V, 50Hz, 1 phase				3 phase		
Net weight (kg)	38	60	38	60	130	230	260

* DB: Dual bar sealing bar positioning options available



Brice Australia Pty. Ltd. ABN 71 413 589 669
100% Australian owned and operated
Copyright ©2017 Brice Australia Pty. Ltd.

BRICE HEAD OFFICE:
11 Holloway Drive,
Bayswater, Victoria 3153 Australia

Ph: 1300 664 880
www.briceaust.com.au
email: info@briceaust.com.au